

Extraction Arms

Glue-fumes extractor

GEOVENT Glue-fumes extractor used for the removal of toxic fumes in gluing of windscreen and sunroofs. The Glue-fumes extractor is available with a range of 2-7 m and are available for wall or ceiling mounting.

You can connect the glue-fumes extractor to a central extraction system.

GEOVENT Glue-fumes extractor with internal carrying arms has a range of reach of 2-7 m.

Three stable, self-adjusting links secure the Gluefumes extractor in the required position.

The GEOFLEX Weld is a lightweight PVC hose, which is very suitable for fumes of most glue products.

Recommended airflow volume: 1000-2000 m³/h

Ordering table for Glue-fumes extractor

Art. No.	Description
01-202	Wing arm ø160mm, 2 m – with quickcoupling/ ball joint - w/o hood
01-202A	Wing arm ø200mm, 2m – with quickcoupling/ ball joint - w/o hood
01-200	Wing arm ø160mm, 3 m – with quickcoupling/ ball joint - w/o hood
01-200A	Wing arm ø200mm, 3m – with quickcoupling/ ball joint - w/o hood
12-243	Extraction hood for windscreen gluing 850x600 mm of polycarbonate with quick-coupling ø160 mm
12-243A	Extraction hood for windscreen gluing 850x600 mm of polycarbonate with quick-coupling ø200 mm
12-242	Panel fume extractor ø160x1300 mm of aluminum with quick-coupling
10-247	Detachable welding hood ø160/385 for quick-coupling uncoupling – with 25 mm suction edge
10-248	Detachable welding hood ø200/385 for quick-coupling uncoupling – with 25 mm suction edge

Accessories for Glue-fumes extractor

Art. No.	Description
01-540	Wall Console ø160 mm, 260 mm from wall
01-541	Wall Console ø200 mm, 280 mm from wall
91-289A	Quick-coupling ø160 mm
91-290A	Quick-coupling ø200 mm




Extraction hood for windscreen gluing



Panel fume extractor



Glue-fumes extractor

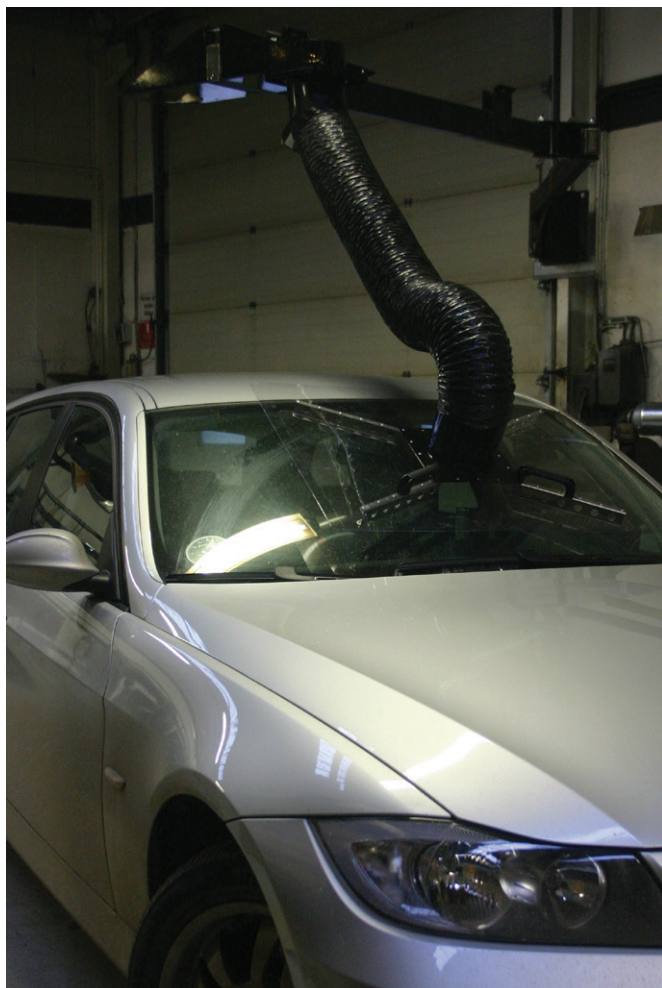

Extraction hood for windscreen gluing in use.



Wall Console.



Panel fume extractor - mounted with wall bracket and connection.



Workshop Environment with Panel fume extractor.



Workshop Environment with Panel fume extractor.